

ABB component drive

ACS50, 0.18 kW - 0.75 kW
Technical catalogue

Drive^{IT} Low Voltage AC Drive



ABB component drive



What is an ABB component drive?

The ABB component drives meet the requirements of OEMs, installation companies and panel builders. It is a component that is bought, together with other components from a logistical distributor. The drive is stocked, and the number of options and variants is optimized for logistical distribution.

ABB component drive promises

- No programming - easy and descriptive interface
- Compact size and thin shape
- Ideal drive for DIN-rail mounting
- Low EMC emissions
- Silent motor

Where can it be used?

- Fans
- Pumps
- Gate control
- Material handling
- Conveyors

Highlights

- Power range 0.18 - 0.75 kW (100 - 240 V)
- IP 20
- Integral EMC filter for 1st environment (EN61800-3)
- Optimized switching frequency for noise (up to 16 kHz)

What are its main features?

Feature	Note	Benefit
No programming	All the inverter parameter settings are done with DIP switches and potentiometers	Faster set-up Easier configuration Easier drive for new users
Compact size and thin shape	up to 0.37 kW 45 mm width, 0.75 kW 67.5 mm width	Less space required for installation
Removable mounting clip	Removable clip allows DIN-rail and wall mounting from back and side of the unit	Flexible and easy mounting
EMC	1 st environment EMC filters as standard	Low EMC emissions
Automatic switching frequency	Increases switching frequency automatically, when drive temperature is decreased	Provides lowest possible noise without derating of the drive

Ratings, types and voltages



Built-in EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V											
P _N kW	P _N hp	Output		Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		Nominal current	Max current								
0.18	0.25	1.4	2.1	4.4	ACS50-01E-01A4-2	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	6.9	ACS50-01E-02A2-2	A	170	146.5	45	128	0.7
0.75	1.0	4.3	6.5	10.8	ACS50-01E-04A3-2	B	170	146.5	67.5	128	0.9

No EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V											
P _N kW	P _N hp	Output		Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		Nominal current	Max current								
0.18	0.25	1.4	2.1	4.4	ACS50-01N-01A4-2	A	170	146.5	45	128	0.55
0.37	0.5	2.2	3.3	6.9	ACS50-01N-02A2-2	A	170	146.5	45	128	0.6
0.75	1.0	4.3	6.5	10.8	ACS50-01N-04A3-2	B	170	146.5	67.5	128	0.8

Built-in EMC filter, 1-phase supply voltage 100/120 V, +10/-15%, 3-phase output 200/240 V											
P _N kW	P _N hp	Output		Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		Nominal current	Max current								
0.18	0.25	1.4	2.1	6.4	ACS50-01E-01A4-1	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	9.5	ACS50-01E-02A2-1	A	170	146.5	45	128	0.7

No EMC filter, 1-phase supply voltage 100/120 V, +10/-15%, 3-phase output 200/240 V											
P _N kW	P _N hp	Output		Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		Nominal current	Max current								
0.18	0.25	1.4	2.1	6.4	ACS50-01N-01A4-1	A	170	146.5	45	128	0.55
0.37	0.5	2.2	3.3	9.5	ACS50-01N-02A2-1	A	170	146.5	45	128	0.6

Options



Potentiometer

Type code
ACS50-POT



EMC filter for 1st and 2nd environment

Type code	Height mm	Width mm	Depth mm	Weight kg
ACS50-IFAB-01	146.5	45	128	0.7

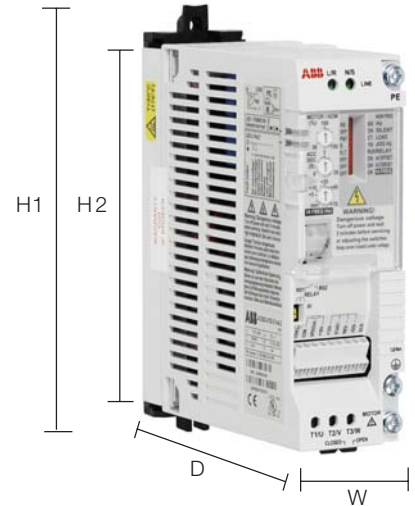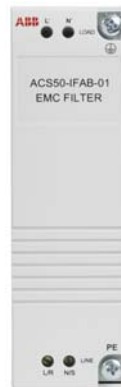

H = Height with mounting clip
H2 = Height without mounting clip
W = Width
D = Depth

Input and output chokes

Choke type	L/mH	Dimensions H x W x D mm	Weight kg	Max. cable mm ²	I/A	ACS50 frame size
SACL21 (input)	3.2	76x63x62	1.0	4	8.5	A
SACL22 (input)	1.5	92x76x63	1.3	10	15	B
ACS-CHK-B3 (output)	1.5	300x102x112	4.0	4	8	A/B

Technical specification

Mains connection

Power range	0.18- 0.75 kW
Voltage	1-phase, 100 to 115 V and 200 to 240 V, +10/-15%
Frequency	48 to 63 Hz

Motor connection


Voltage	3-phase, from 0 to U_{SUPPLY} (for 100/115 V from 0 to 230 V)
Frequency	0 - 120/130 Hz
Overload capacity	150% (60 s)
Switching frequency	
Standard	5 kHz, adjustable up to 16 kHz with automatic switching frequency reduction
Acceleration time	0.1 to 30 s
Deceleration time	0.1 to 30 s

Environmental limits

Ambient temperature	
0 to 40°C	with nominal current and 5 kHz switching frequency
up to 50°C	with derating
-20°C	with restrictions
Altitude	
Output current	I_2 : 0 to 1000 m reduced by 1% per 100 m over 1000 m to 2000 m
Relative humidity	lower than 95% (without condensation)
Protection class	IP 20
Contamination levels	No conductive dust allowed, corrosive liquids or gases (IEC60721-3-3)

Control connections

One analog input	
Voltage signal	0 (2) to 10 V, 200 k Ω single-ended
Current signal	0 (4) to 20 mA, 100 Ω single-ended
Potentiometer reference value	10 V \pm 2% max. 10 mA, 1k Ω \leq R \leq 10 k Ω
Response time	\leq 60 ms
Resolution	0.1%
Accuracy	\pm 1%
Three digital inputs	
	12 V DC with internal or 12 V ... 24 V DC external supply, PNP
Input impedance	1.5 k Ω
Response time	\leq 9 ms
One relay output	
Switching voltage	12 to 250 V AC or max 30 V DC/0.5 A
Maximum continuous current	2 A

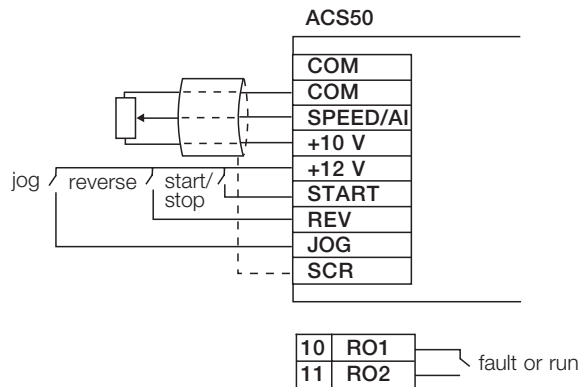

Product compliance

Low Voltage Directive 73/23/EEC with supplements
 EMC Directive 89/336/EEC with supplements
 Quality assurance system ISO 9001 and Environmental system ISO 14001
 CE, UL, ULc, CSA and C-Tick approvals



ABB Oy

Drives
 P. O. Box 184
 FIN - 00381 Helsinki
 Finland
 Telephone +358 10 22 11
 Fax +358 10 222 2764
 Internet <http://www.abb.com/motors&drives>